UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/596,859	06/27/2006	Per Johan Anders Nystrom	P19103-US1	1377

27045   7590   10/07/2011
ERICSSON INC.
6300 LEGACY DRIVE
M/S EVR 1-C-11
PLANO, TX 75024

EXAMINER
JAMA, ISAAK R

ART UNIT	PAPER NUMBER
2617	

NOTIFICATION DATE	DELIVERY MODE
10/07/2011	ELECTRONIC

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Notice of the Office communication was sent electronically on above-indicated "Notification Date" to the following e-mail address(es):

kara.coffman@ericsson.com
jennifer.hardin@ericsson.com
melissa.rhea@ericsson.com

UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents
United States Patent and Trademark Office
P.O. Box 1450
Alexandria, VA 22313-1450
www.uspto.gov

BEFORE THE BOARD OF PATENT APPEALS
AND INTERFERENCES

Application Number: 10/596,859
Filing Date: June 27, 2006
Appellant(s): NYSTROM ET AL.

_____

Per Johan Anders Nystrom
<u>For Appellant</u>

EXAMINER'S ANSWER

This is in response to the appeal brief filed 09/17/2009 appealing from the Office action

mailed 08/11/2009.

(1) Real Party in Interest

The real party in interest in the present appeal is Telefonaktiebolaget LM

Ericsson (Publ) AN, assignee of the present application.

(2) Related Appeals and Interferences

The Examiner is not aware of any related appeals, interferences, or judicial

proceedings which will directly affect or be directly affected by or have a bearing on the

Board's decision in the pending appeal.

(3) Status of Claims

The statement of the status of claims contained in the brief is correct.

(4) Status of Amendments After Final

The appellant's statement of the status of amendments after final rejection

contained in the brief is correct.

(5) Summary of Claimed Subject Matter

The summary of claimed subject matter contained in the brief is correct.

(6) Grounds of Rejection to be reviewed on Appeal

The appellant's statement of the grounds of rejection to be reviewed on appeal is

correct.

(7) Claims Appendix

The copy of the appealed claims contained in the Appendix to the brief is correct.

(8) Evidence Relied Upon

20070188665	Krishnan et al.	1-2003
2003/0169681	Li et al.	4-2001

7,386,306   Laroia et al.   12-2004

(9) Grounds of Rejection

The following ground(s) of rejection are applicable to the appealed claims:

The same references, Watson and Castillo, have been used in the action below.

Claim Rejections - 35 USC § 103

1.   The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all

obviousness rejections set forth in this Office action:

> (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.

2.   Claims 1, 2, 6-12, 14-18, 21-26 are rejected under 35 U.S.C. 103(a) as being

unpatentable over Watson et al US 20070188665 in view of Castillo US 20040001500.

3.   Regarding claims 14, and 23-25, Krishnan teaches a method, system, base

station and a mobile station in a multicarrier wireless telecommunication system for

radio communication between base stations and mobile user stations **[Title]**, comprising

the step of: detecting a presence of an acquisition channel by a mobile station for

mobile station search purposes; transmitting information signals over the detected

acquisition channel **[Columns 1 and 2, lines 62-67 and lines 1-3; i.e. Pilot**

transmission represents overhead in the OFDM system. Thus, it is desirable to

minimize pilot transmission to the extent possible. However, because of noise

and other artifacts in the wireless channel, a sufficient amount of pilot needs to

be transmitted in order for the receiver to obtain a reasonably accurate estimate of the channel response. Moreover, the pilot transmissions need to be repeated to account for variations in the channel over time due to fading and changes in the multipath constituents], relating to size and location of operational bands of the radio spectrum used by the system; wherein the information signals comprise information of the bandwidth, and location, in the spectrum of the operational bands as part of the information in one or more sub carriers of the bands **[Figures 5, column 11, lines 22-40; i.e. FIG. 5 illustrates an embodiment of an OFDM subband structure 500 that supports subband multiplexing. In this embodiment, the M usable subbands are initially divided into S disjoint sets, with each set including Q consecutive subbands, where QS.ltoreq.M. The Q subbands in each set are assigned to the Q groups such that the i-th subband in each set is assigned to the i-th group. The S subbands in each group would then be uniformly distributed across the M usable subbands such that consecutive subbands in the group are separated by Q subbands. The M usable subbands may also be distributed to the Q groups in some other manners. The Q groups of subbands may be assigned to up to Q terminals for uplink pilot transmission. Each terminal would then transmit a pilot only on its S assigned subbands. With subband multiplexing, up to Q terminals may simultaneously transmit pilots on the uplink on up to M usable subbands. This can greatly reduce the amount of overhead needed for uplink pilot transmission].** But Krishnan does not specifically teach the location in the spectrum of the operational bands. Li teaches a multi-carrier communications with

group-based subscriber allocation **[Title]**, whereby the base station selects one or more

clusters (i.e. a group of sub-channels) for each subscriber and then notifies the

subscriber regarding cluster allocation **[Figure 1B, steps 104 & 105, see also page 3,**

paragraph 0043], in addition, Li teaches that the base station transmits to the

subscriber pilot symbols that occupies the entire OFDM frequency bandwidth and

showing the used **(shaded)** and unused **(un-shaded)** clusters in different cells **[Figures**

2A-C, page 5, paragraph 0064]. Therefore, it would have been obvious to a person of

ordinary skill in the art to include the multi-carrier communications with group-based

subscriber allocation of Li in the method and apparatus of Krishnan in order for the base

station to inform the mobile station of the available sub-channels.

4.   Regarding claims 15 and 17, Krishnan further teaches that the location

information is explicitly signaled or implicitly derivable from synchronization signals, and

that the size information is repeated regularly in subsequent carriers, or sub-carriers, of

the operational band **[Figure 5, showing the M-usable bands of the bandwidth, and**

their sizes F, F+Q, F+2Q, F+3Q...].

5.   Regarding claims 16 and 26, Krishnan further teaches that the signaling is

received by the mobile user stations which detect the information about available blocks

of the spectrum and stores it into a memory **[At terminal 750, the downlink**

modulated signal is received by antenna 752 and provided to a receiver unit

(RCVR) 754. Receiver unit 754 conditions (e.g., filters, amplifies, and frequency

downconverts) the received signal and digitizes the conditioned signal to provide

samples. An OFDM demodulator 756 then removes the cyclic prefix appended to

each OFDM symbol, transforms each recovered transformed symbol using an

FFT, and demodulates the recovered modulation symbols to provide

demodulated data. An RX data processor 758 then decodes the demodulated data

to recover the transmitted traffic data. The processing by OFDM demodulator 756

and RX data processor 758 is complementary to that performed by OFDM

modulator 720 and TX data processor 710, respectively, at access point 700.

OFDM demodulator 756 may further determine the initial channel frequency

response estimate [circumflex over (H)]$_d$ or provide the received pilot symbols

that may be used].

6.   Regarding claim 18, Krishnan further teaches that the information comprises the

start and stop frequencies of the band and, thereby, the bandwidth **[Figure 5, see for**

example set 1, first Q subband and the clear marking of where the bandwidth of

that subband start and where it ends].

7.   Regarding claim 19, Krishnan further teaches that the information comprises an

identifying number representing the size and location of available operational bands

[Figure 5, #s F, F+Q, F+2Q, F+3Q, F+SQ, F+M-1].

8.   Regarding claim 20, Krishnan further teaches that the mobile user stations

repeatedly scan the information signaling for updating its memory about changing

conditions relating to the operational bands **[Columns 1 and 2, lines 62-67 and lines**

1-3; i.e. Pilot transmission represents overhead in the OFDM system. Thus, it is

desirable to minimize pilot transmission to the extent possible. However, because

of noise and other artifacts in the wireless channel, a sufficient amount of pilot

needs to be transmitted in order for the receiver to obtain a reasonably accurate estimate of the channel response. Moreover, the pilot transmissions need to be <u>repeated</u> to account for variations in the channel over time due to fading and changes in the multipath constituents].

9.   Regarding claim 22, Li further teaches a mobile user station requests access to a multicarrier band with N carriers **[Figure 1A]** for downloading information, comprising the steps of: the mobile station searching the radio interface for an N-carrier band by looking for location and size information; the communication system assigning a free band with $N+\varepsilon$ carriers to the mobile upon the request where ε is zero or a small number compared to N; and, the mobile station downloads the information **[page 3, paragraph 0040; i.e. N= 512 sub-carriers, and ~ being zero].**

10.   Regarding claim 10, Castillo teaches wherein at least one of the plural prediction techniques uses content of the video data associated with each channel to determine the predicted next channel **(paragraph [0021]).**

11.   Claim 21 is rejected under 35 U.S.C. 103(a) as being unpatentable over U.S. Patent Number 7,039,001 (Krishnan et al.) in view of U.S. Patent Application Publication Number 2003/0169681 (Li et al.) and further in view of U.S. Patent Number 6,650,655 (Alvesalo et al.).

12.   Regarding claim 21, Krishnan and Li has been discussed above in regard to claim 14, but Li fails to teach that the operational bands belong to different network operators and wherein the subscribers of an operator may partly or wholly have access to the operational bands of another operator. Alvesalo teaches a system and method for

allocating transmission resources between different networks where the available

bandwidth is shared among the different networks **[Figure 2, column 11, lines 29-34]**.
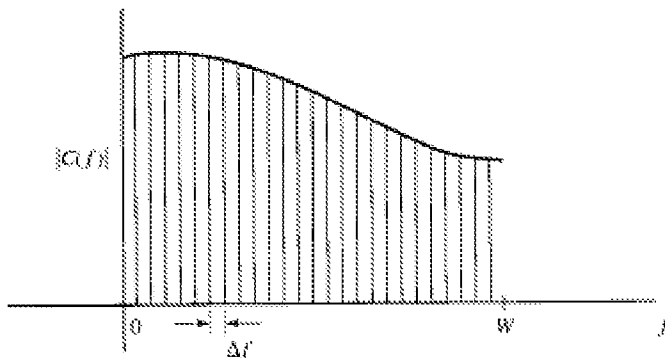
Therefore, it would have been obvious to a person of ordinary skill in the art at the time

the invention was made to include the resource allocation system of Alvesalo in the

combined systems of Krishnan and Li in order for the mobiles in the system to have a

seamless communication.

(10) Response to Argument

TECHNOLOGY BACKGROUND

OFDM is a multiplexing technique that divides the available bandwidth into

multiple frequency sub carriers that are closely spaced to each other without causing

interference. The sub-carriers are divided into groups of sub-carriers, each group called

a sub-channel. The sub-carriers that form a sub-channel need not be adjacent to each

other. OFDMA provides multiplexing operation of data streams from multiple users onto

the downlink sub-channels and uplink multiple access by means of uplink sub-channels.

In OFDMA, each symbol consists of sub-channels that carry data sub-carriers carrying

information, pilot sub-carriers that serve as control signals, DC sub-carriers as the

center frequency, and the guard sub-carriers for keeping space between OFDMA

signals.

In multicarrier modulation, the available bandwidth W is divided into a number N_c

of subbands, commonly called subcarriers, each of <u>width</u> $\Delta f = W/N_c$ (i.e. **the size** of

each of the subcarriers) as seen in the graph below.

Summary of Appellant's arguments and Examiner's Stance:

In general, the appellant mainly argues that in a multicarrier wireless

telecommunication system for radio communication between base stations and mobile

user stations, comprising the step of: detecting a presence of an acquisition channel by

a mobile station for mobile station search purposes; transmitting information signals,

over the detected acquisition channel, relating to size and location of operational bands

of the radio spectrum used by the system; wherein the information signals comprise

information of the bandwidth and location in the spectrum of the operational bands as

part of the information in one or more sub carriers of the bands is neither taught or

suggested by Krishnan alone or in combination with Li.

The Examiner respectfully disagrees because:

Krishnan teaches a method, system, base station and a mobile station for

detecting a presence of an acquisition channel by a mobile station for mobile station

search purposes; transmitting information signals over the detected acquisition channel

in columns 1 and 2, lines 62-67 and lines 1-3; i.e. Pilot transmission represents

overhead in the OFDM system. Thus, it is desirable to minimize pilot transmission to the

extent possible. However, because of noise and other artifacts in the wireless channel,

a sufficient amount of pilot needs to be transmitted in order for the receiver to obtain a

reasonably accurate estimate of the channel response. Moreover, the pilot

transmissions need to be repeated to account for variations in the channel over time

due to fading and changes in the multipath constituents, relating to size and location of

operational bands of the radio spectrum used by the system; wherein the information

signals comprise information of the bandwidth, and location, in the spectrum of the

operational bands as part of the information in one or more sub carriers of the bands in

Figures 5, column 11, lines 22-40; i.e. FIG. 5 illustrates an embodiment of an OFDM

subband structure 500 that supports subband multiplexing. In this embodiment, the M

usable subbands are initially divided into S disjoint sets, with each set including Q

consecutive subbands, where QS.ltoreq.M. The Q subbands in each set are assigned to

the Q groups such that the i-th subband in each set is assigned to the i-th group. The S

subbands in each group would then be uniformly distributed across the M usable

subbands such that consecutive subbands in the group are separated by Q subbands.

The M usable subbands may also be distributed to the Q groups in some other

manners. The Q groups of subbands may be assigned to up to Q terminals for uplink

pilot transmission. Each terminal would then transmit a pilot only on its S assigned

subbands. With subband multiplexing, up to Q terminals may simultaneously transmit

pilots on the uplink on up to M usable subbands. This can greatly reduce the amount of

overhead needed for uplink pilot transmission. But Krishnan is silent on the issue

regarding the location in the spectrum of the operational bands. Li teaches a multi-

carrier communications with group-based subscriber allocation, whereby the base

station selects one or more clusters (i.e. a group of sub-channels) for each subscriber

and then notifies the subscriber regarding cluster allocation in Figure 1B, steps 104 &

105, see also page 3, paragraph 0043, in addition, Li teaches that the base station

transmits to the subscriber pilot symbols that occupies the entire OFDM frequency

bandwidth and showing the used (shaded) and unused (un-shaded) clusters in different

cells in Figures 2A-C, page 5, paragraph 0064. Therefore, it would have been obvious

to a person of ordinary skill in the art to include the multi-carrier communications with

group-based subscriber allocation of Li in the method and apparatus of Krishnan in

order for the base station to inform the mobile station of the available sub-channels.

Therefore the examiner contends that Krishnan did show in a multicarrier

wireless telecommunication system for radio communication between base stations and

mobile user stations, comprising the step of: detecting a presence of an acquisition

channel by a mobile station for mobile station search purposes; transmitting information

signals, over the detected acquisition channel, relating to size and location of

operational bands of the radio spectrum used by the system; wherein the information

signals comprise information of the bandwidth and location in the spectrum of the

operational bands as part of the information in one or more sub carriers of the bands,

and that the combination showed all the argued limitations and the rejection should

stand.

(11) Related Proceeding(s) Appendix

No decision rendered by a court or the Board is identified by the examiner in the

Related Appeals and Interferences section of this examiner's answer.

For the above reasons, it is believed that the rejections should be maintained.

Respectfully submitted,

Isaak R. Jama

Examiner, Art Unit 2617

Conferees:

/Isaak R. Jama/

Examiner, Art Unit 2617

/NICK CORSARO/

Supervisory Patent Examiner, Art Unit 2617

/LESTER KINCAID/

Supervisory Patent Examiner, Art Unit 2617